





學 雅 器



Evoke 6 Snack Merchandiser								
Selections		Up to 70 items (6 Tray); 82 Items (7 Tray)						
Electrical Requirements	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS							
Dimensions	Height	Height 72" Width 46" Depth 35.2" (89.4 cm)						
Ship Weight	*626 lbs.	*626 lbs. (283.9 kg) *Varies with tray configuration and options.						
Standard Features	System, [elivery As	sist, Braille Key		iVend® Sensor Covers, PayRange		
Options	Online (To	ouch Screen), Nations, Custom	Notor Pai	ring, Audio Inte	rface, Cus	Interface, inDEX tom Coil and Tray el & Changeable		

LCOMPLIANT F€ C € CUL





Product Capacity and Flexibility

633 Items (6 Tray) (252 Snack-Pastry/381 Candy) 773 Items (7 Tray) (296 Snack-Pastry/477 Candy)







Shown with optional 7th tray, optional 10.1" touch screen and standard leg covers.

Efficient LED

10.1" Touch Screen iCart Interface

Optional



ADA Compliant





Full-Size 7th Tray Optional



Evoke 5 Snack Merchandiser							
Selections	Up to 65 items						
Capacity	528 Items	(210 Snack &	Pastry / 3	318 Candy)			
Payment Systems	All Industi	ry standard MD	B compa	tible devices			
Data Communication	DEX/UCS						
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS					
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	35.2" (89.4 cm)	
Ship Weight	*564 lbs.	(256 kg) *Varie	es with tr	ay configuratio	n and opt	tions.	
Standard Features	System, D		livery Ass	sist, Braille Key		, iVend® Sensor Covers, PayRange	
Options	Mint Tray, Tray Confi	inDEX Online	(Touch So tom Color	creen), Audio Ir	nterface, (airing, Gum and Custom Coil and Changeable LED	







Bakedi Ba	
porito.	7
PHELIP Doritos Same	0.2.3
	4 5 6 7 6 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9
	& P
<u>-</u>	

Available with platinum silver door.

Mercato 5000 Snack Merchandiser								
Selections	Up to 65	Up to 65 items						
Payment Systems	All Indus	try standard	MDB cor	mpatible device	es			
Data Communication	DEX/UCS	DEX/UCS						
Electrical Requirements	ı	o: 115 VAC/6 onal: 230 V	,					
Dimensions	Height	72" (183 cm)	Width	41.1" (104.4 cm)	Depth	34.75" (88.3 cm)		
Shipping Weight	*516 lbs.	(234 kg) *l	aries wit	h configuration	& option	S.		
Standard Features	ı	GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Motor Pairing Capable & Back Lighted Braille Keypad						
Options	Online (T	ouch Screer	n), ADA D		tor Pairin	nd Technology, inDEX g, Additional Gum & ics		











Shown with optional 7" touch screen. Available with black door.

Mercato 4000 Snack Merchandiser								
Selections	Up to 52	items						
Standard Configuration	423 Item	423 Items (128 Snack / 255 Candy / 40 Pastry)						
Payment Systems	All Indus	try standard N	1DB compa	tible devices				
Data Communication	DEX/UCS	;						
Electrical Requirements	Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS							
Dimensions	Height	72" (183 cm)	Width	35-5/32" (89 cm)	Depth	34.75" (88.3 cm)		
Shipping Weight	*481 lbs	. (218.2 kg) *l	aries with	configuration & opt	tions.			
Standard Features	Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, inDEX Online (Touch Screen),Back Lighted Braille Keypad, Motor Pairing Capable, and Gum & Mint Helixes							
Options	(Touch S		elivery Bin,	Motor Pairing, Add		ology, inDEX Online n & Mint Tray, Kick		









Bakedy Bakedy Double	
35	
Paritos	6 2 3 4 4 6 6 7 6 8
	Ø P ≟

Available with platinum silver door.

Mercato 3000 Snack Merchandiser								
Selections	Up to 36 items							
Standard Configuration	360 Item	360 Items (114/ Snack / 198 Candy / 48 Pastry)						
Payment Systems	All Indus	try standard N	1DB compa	tible devices				
Data Communication	DEX/UCS	3						
Electrical Requirements		Domestic: 115 VAC/60Hz, 1.2 AMPS International: 230 VAC/50Hz, 0.6 AMPS						
Dimensions	Height	72" (183 cm)	Width	29.3" (74.4 cm)	Depth	34.75" (88.3 cm)		
Shipping Weight	*431 lbs	. (195.5 kg) *l	aries with	configuration & opt	tions.			
Standard Features	Dual Helix, GVC2 Controller with Scrolling VF Display, LED Lighting, iVend® Delivery Sensor System, Back Lighted Braille Keypad, Motor Pairing Capable and Gum & Mint Helixes							
Options	inDEX Or	nline (Touch S	creen), ADA	FLEX controller, in Delivery Bin, Moto ors & Custom Grap	or Pairing, A	• • • • • • • • • • • • • • • • • • • •		











Evoke Elevator Refrigerated Merchandiser							
Selections	Up to 60 It	Up to 60 Items					
Capacity	Varies with	n Tray Confi	guration				
Payment Systems	All Industr	y standard	MDB Com	patible Devi	ces		
Data Communication	DEX/UCS						
Refrigeration	Super 1/3	HP, R134A					
Electrical Requirements	Internation With Heat	Domestic: 115 VAC/60Hz, 8 AMPS International: 230 VAC/50Hz, 4 AMPS; With Heated Glass Option: 115 VAC/60Hz, 9 AMPS International: 230 VAC/50Hz, 4.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	41" (104 cm)	Depth	38" (97 cm)	
Ship Weight	*831lbs. (3	376.9kg) *	Varies with	tray configu	ıration an	d options.	
Standard Features	System, Li Covers, Ele	ghted Deliv evator Deliv	ery Bin, D ery, Braill	oor Switch, \ e Keypad, Pr	lersatile S ogramma	nting, iVend® Sensor Steel Beverage Tray, Leg ble by Individual Selec- m & ADA Compliant	
Options	Screen), M and Tray C (Heated Gl	tions, Range & Row, PayRange Mobile Payment System & ADA Compliant 7" iCart Touch Screen Interface, UVend Technology, inDEX Online (Touch Screen), Motor Pairing, High Capacity Can Tray, Audio Interface, Custom Coil and Tray Configurations, Custom Colors, Custom Graphics, Automatic Controller (Heated Glass), Changeable LED Backlit POS, R-513A (SNAP Compliant) Refrigeration & Kick Panel					
Refrige	erant AP	الح	COMF	DA PLIANT	(€	c NAMA LISTED	

Evoke Elevator

Shown with standard 3.5" display and braille identified keypad.

Proven Elevator System Gently Delivers Products

Packaged meals, salads, sandwiches, juices, carbonated beverages, fresh fruit, dairy products including milk & yogurt

First in First Out Loading

Reduces Spoilage up to 30%

20% Greater Capacity

When compared with competitors

Health Safety

Programmable by selections, range and row







All Industry standard MDB Compatible Devices

With Heated Glass Option: 115 VAC/60Hz, 9 AMPS

Width

Domestic: 115 VAC/60Hz, 8 AMPS International: 230 VAC/50Hz. 4 AMPS

International: 230 VAC/50Hz, 4.5 AMPS



Coil and Tray Configurations, Custom Colors, Custom Graphics, Kick Panel, Automatic Controller (Heated Glass), R-513A (SNAP Compliant) Refrigeration & Changeable LED Backlit POS

Selections

Capacity

Payment Systems

Refrigeration

Requirements

Dimensions

Ship Weight

Standard Features

Electrical

Up to 60 Items

DEX/UCS

Varies with Tray Configuration

72

(183cm)

*811 lbs. (367.8 kg)

Super 1/3 HP, R134A







38"

(97cm)

Evoke VT5

Shown with optional High Capacity Can Tray, optional 7" touch screen and standard leg covers.

Evoke ST5

Shown with standard 3.5" display, braille identified keypad and standard leg covers.







Depth

(104 cm)

System, Door Switch, ADA Delivery Bin, Braille Keypad, Full Health Safety Feature, Leg Covers, PayRange Mobile Payment System & ADA Compliant 7" iCart Touch Screen Interface, UVend Technology, Motor Pairing, inDEX

Online (Touch Screen), High Capacity Can Tray, Audio Interface, Custom

*Varies with tray configuration and options. FLEX Controller with 3.5" LCD Color Display, LED Lighting, iVend® Sensor



Evoke VT3

Shown with optional High Capacity Can Tray, optional 7" touch screen and standard leg covers

Evoke ST3

Shown with standard 3.5" display. braille identified keypad and leg covers.

Evoke 3 Refrigerated Merchandiser						
Selections	Up to 36	Up to 36 Items				
Capacity	Varies wi	th Tray Configu	ıration			
Payment Systems	All Indust	try standard M	DB Compa	tible Devices		
Data Communication	DEX/UCS					
Refrigeration	Super 1	/3 HP, R134A				
Electrical Requirements	Domestic: 115 VAC/60Hz, 8 AMPS International: 230 VAC/50Hz, 4 AMPS With Heated Glass Option: 115 VAC/60Hz, 9 AMPS International: 230 VAC/50Hz, 4.5 AMPS					
Dimensions	Height 72" Width 29.5" Depth 38" (97 cm)					
	1	(100 011)		(,		, ,
Ship Weight	*691 lbs.	(313.4 kg) *V	aries with	· · ·	tion and o	ptions.
Ship Weight Standard Features	FLEX Cor System,	(313.4 kg) *V ntroller with 3.5 Door Switch, A	5" LCD Col DA Deliver	tray configura or Display, LEI y Bin, Braille K	D Lighting Ceypad, Fu	ptions. , iVend® Sensor III Health Safety ADA Compliant

















Evoke Outdoor Refrigerated Merchandiser							
Selections	Up to 60	Up to 60 Items					
Capacity	Varies w	vith tray confi	guration				
Payment Systems	All Indus	All Industry standard MDB Compatible Devices					
Data Communication	DEX/UC	DEX/UCS					
Refrigeration	Super 1	/3 HP, R134A	or R-513/	A (SNAP Cor	npliant)		
Electrical Requirements	Internati With He	Domestic: 115 VAC/60Hz, 8 AMPS International: 230 VAC/50Hz, 4 AMPS With Heated Glass Option: 115 VAC/60Hz, 9 AMPS International: 230 VAC/50Hz, 4.5 AMPS					
Dimensions	Height	72" (183 cm)	Width	45" (114 cm)	Depth	40" (102 cm)	
Ship Weight	*830 lbs	s. (376.5 kg)	*Varies w	ith tray config	guration a	nd options.	
Standard Features	Outdoor Package, GVC2 Controller, Heated Glass, Leg Covers, LED Lighting, ADA Delivery Bin, ADA Compliant, iVend® Sensor System, and Door Switch						
Options	Technol	, Dual Helix, N ogy, High Cap ation, Custom	acity Can	Tray, R-513A	(SNAP C		











Shown with standard 3.5" display, braille identified keypad and leg covers.

Outdoor Package

Impact resistant Lexan window cover, rain guards and anti-pry covers provide superior resistance to the elements, vandals and thieves.







Shown with platinum silver door. Available with black door.

Alpine Combi 3000	Refrig	erated/Fro	ozen M	erchandi	ser			
Selections	Up to 36	Up to 36 Items						
Capacity	320 Item	320 Items, Configurable up to 540						
Payment Systems	All Industry standard MDB Compatible Devices							
Data Communication	DEX/UCS	DEX/UCS						
Refrigeration	½ HP, R-	½ HP, R-404A						
Electrical Requirements		Domestic: 115 VAC/60Hz, 13 AMPS International: 230 VAC/50Hz, 6.5 AMPS						
Dimensions	Height	72" (183 cm)	Width	29.5" (75 cm)	Depth	38" (97 cm)		
Ship Weight	*680 lbs.	. (308.4 kg) *Va	aries with t	tray configurat	ion and op	otions.		
Standard Features		elivery Sensor ciency Modular			eated Glas	s and		
Options	Screen),	Assist Box, <i>InD</i> Motor Pairing, (SNAP Complia	Dual Helix	, Can & Bottle	Tray, Cust	Online (Touch com Graphics,		









Available in Multi-Zone Configuration or Full Frozen Configuration

Vend refrigerated foods from the top zone at 36°F and frozen deserts at -15°F from the bottom.



Fresh Brew and Freeze Dried Models Available



Evoke Coffee Hot Beverage Merchandiser								
Selections	11 Major Selections & up to 34 Beverage Combinations of Coffee, Specialty Coffees, Hot chocolate, Tea, Cappuccino & Espresso							
Capacity	Up to 400 - 7 oz (210 ml) squat cups; Up to 384 - 12 oz (355 ml) cups Accommodates cups up to a lip diameter of 2.9-3.25" (73-82.5 mm)							
Payment Systems	All Industry standard MDB Compatible Devices							
Data Communication	DEX/UCS, EVA-DTS compatible, USB copy/clone feature							
Electrical Requirements	Domestic: 115 VAC/60Hz., 9.6 AMPS; International: 230 VAC/50Hz 4.8 AMPS							
Dimensions	Height	72" (183 cm)	Width	27.5" (70.5 cm)	Depth	28" (71 cm)		
Ship Weight	*361 lbs. (163.7 kg) *Varies with configuration and options.							
Water Requirement	15-116 psi (1-8 Bar)							
Standard Features	LED lighting, iVend® Delivery Sensor System, Advanced Power Management System, Automatic Delivery Door, Timed Free Vend, Discounting, One Touch Servicing							
Options	Fresh Brew and Freeze Dry Models, USB Programming Harness, Custom Colors, Custom Graphics, UVend Technology and Kick Panel							









Evoke 10 Cold Drink Vendor								
Selections	10 Selections							
Capacity	12 oz (355 ml) Can: 500 *20 oz (591ml) Bottle: 240 *24 oz (710 ml) Bottle: 240 * <i>Capacities vary depending on packaging.</i>							
Payment Systems	All Industry standard MDB Compatible Devices							
Data Communication	DEX/UCS							
Refrigeration	Super 1/3 HP, R-513a (SNAP Compliant)							
Electrical Requirements	Domestic: 115 VAC/60Hz., 7 AMPS; International: 230 VAC/50Hz 3.5 AMPS							
Dimensions	Height	72" (183 cm)	Width	31.75" (80.7 cm)	Depth	36.5" (92.7 cm)		
Ship Weight	*671lbs (304.3 kg) *Varies with options.							
Standard Features	Delivery Drop Sensor, Live Product Display, Eye Catching Back Lighted Display							
Options	inDEX Tool (Pricing Only), UVend Technology, Custom Colors, Custom Graphics, Extra 16.9oz filler, 250ml kit, 500 ml kit							











DELIVERY LOCKERS





Allow end-users to streamline their mobile ordering or pick-up experience with a complete end-to-end contactless experience.

Shown with Optional Graphics Wrap and Touch Screen

INCREASE ORDER THROUGHPUT



Improves operations and reduces costs by eliminating bottlenecks and improving customer throughput

KEEPS FOOD FRESH



Insulated cubbies keep hot and cold food viable for 30+ minutes at a time

REDUCES ORDER MIX-UPS



Create pick-up efficiencies and reduce order mix-ups





Self Service Convenience with the Security you Need

Vending + Micro Market Hybrid



PAY



GRAB



SCAN



CHECK OUT

In order to bring you the best products possible, we continue to improve product design and performance and as such specifications are subject to change without notice. The manufacturer makes no warranties or representations of compliance with any local, state, national or international requirements for the operation of the equipment in any application for which it is capable of being used beyond the UL and NAMA approvals listed on the product. Any purchaser is required to make an independent analysis of the fitness and legality of the products usage before it is deployed and must continue to monitor the potential changing nature of compliance requirements. The manufacturer expressly disclaims responsibility for compliance with any laws and affirmatively requires any buyer to make an independent analysis of the fitness and legal basis of any use or application of the subject unit.

Standard Features & Options

U-Select-It's full line of vendors are packed full of features and available options to help you market more effectively.



Electronic Controllers and Operator Interface

- · Expanded sales and accounting features
- Back lighted keypad with Braille identification
- Bright LED display



UVend Technology (Optional) Quickly and safely sanitizes the machine's high-touch surfaces with UVC light



iVend® Ensured Delivery Sensing Technology Infrared sensor system virtually eliminates misvends and ensures that your customers receive their products or their money back.





Cashless (Optional) Greenlite Cashless accepts



CART 10.1" or 7" Touch Screen **Interfaces (Optional)** Enhances consumer purchase experience. Available with Shopping Cart and Product Info Browse Mode. Communicates purchase information & messages



Motor Pairing Enables pairing two motors together for dispensing wide products.



areenlite

credit, debit & mobile payments.

PUSH-IT Delivery System

PUSH-IT easily adapts to

many different products,

makes restocking simple,

and protects against

(Optional)


misloading.



Flex Shelf Technology

USI vendors feature the most versatile trays on the market with features that make a difference in your bottom line.





- Adjustable snack and candy selections
 - Full snack (5 3/4"W)
 - 3/4 snack (4 5/16"W)
- Candy (2 7/8"W)
- 360 degree helix increments provides flexibility to vend



Gum & Mint Tray (Optional) **Gum & Mint Tray option**

dispenses blister pack gum, rolled mints and even popular energy shots. Available on Mercato 4000, 5000 and Evoke 5.



Versatile Steel Beverage Tray Options Holds up to 60 canned or bottle beverages. 9 and 10 Select Trays

Available.



ADA Delivery Bin (Optional) Standard on Evoke Product is delivered at 15" via lift mechanism. Operates with one hand.



High Capacity Can Tray (Optional)

Add up to 150 - 12 oz cans to your Evoke ST & VT vendors with this patented option.



Heated Glass

Optimum for use in high humidity locations. Standard on Alpine Combi 3000 and Evoke Outdoor ST/VT. Optional Evoke ST/VT5 and ST/VT3.



adjustable in 20 - degree virtually anything



High Security Kit (Outdoor Only)

Impact resistant Lexan window cover, provide superior resistance to the elements, vandals and thieves. *Some features vary by model please consult manufacturer.



Kick Panel (Optional)

Removable bottom panel provides aesthetically pleasing continuous presentation.





Custom Graphics (Optional)

Make your brand, product and marketing initiatives stand out with billboard graphics applied to your equipment.



USB Software Upgrades and DEX Downloads with **Evoke and Geneva**

Never miss a sale with Greenlite Cashless



Give your business the **Greenlite** to grow.



By accepting cashless payment options, including credit, debit and mobile payments, you can increase sales by 30% or more while increasing operational efficiencies.

Features:



Engineered for Mobile Payments



Integrated Cash Management



Timely Deposits, Clear Pricing, Faster Profits



Real-Time Reporting



Advanced Security



Inventory Management



Remote monitoring and pricing

Payment Systems - Conlux Coin Changes and Bill Validators

Coin Changers



Other cash & credit payment systems including international are available.

Please contact U-Select-It for quote.



Confux CV 3000 Series

CONLIEX

Model Type Currency/Capacity

MCM5-1 MDB 5 Tube Cassette - 25¢, 5¢, 25¢, 10¢, 25¢ MCM5-4 MDB 5 Tube Cassette - \$1, 5¢, 25¢, 10¢, 25¢

Bill Validators

CONLUX Lifetime Technical Support

Model Type Currency/Capacity


CV3Y2-U3MUS MDB U.S. 300 Bill Capacity - \$1-\$20 and Coupon - Bottler Front Bezel

CV322-USMUS MDB U.S. 500 Bill Capacity - \$1-\$20 and Coupon - Full Line Front Bezel

CV322-USMUS MDB U.S. 500 Bill Capacity - \$1-\$20 and Coupon - Bottler Front Bezel

Competitive Financing Available

Innovative Finance Solutions Available For:

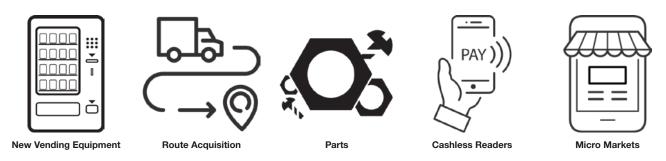

Leasing options also available

Since 1952, we have helped customers grow their vending businesses and reach their goals by providing flexible, competitive financing solutions.

Warranty and Service

Exceptional Quality Backed by Added Assurance

Premium 2-Year Warranty

Nothing drives us to do better than commitment to your peace of mind. That's why every new USI merchandiser comes with a premium 2-year warranty*. True value is owning a quality merchandiser without repair worries.





The Solid Shield Warranty provides up to an additional 36 months of warranty protection. Available with 12, 24 and 36 month coverage options, the Solid Shield Warranty provides peace of mind and coverage for future, unplanned expenses.